

przecinarka do węży hydraulicznych

CUTTING | SERVICE | C400



FEATURES

- Full protection
- Foot pedal operation
- Direct Insert Hose From Front
- Enhanced Structure Stable Cutting
- CE Approved

OPTIONS

- Toothed blade
- 110V/220V 1 Phase
- 230V/440V/480V 3 Phase

C400

TECHNICAL DATA

Max. hose size (inch) ¹⁾	2"4SP
Diameter (blade) external (mm)	250
Diameter (blade) internal (mm)	40
Max. hose OD (mm)	75
Exhaust outlet OD (mm)	100
Motor Power (KW) ²⁾	3.0(400V 3 Phase)
Motor Power (HP) ²⁾	4.0

maksymalny wąż
 średnica tarczy
 średnica wewnętrzna tarczy
 maksyma średnica węża
 średnica odciagu
 zasilanie

DIMENSIONS (LxWxH)


DIMENSIONS (LxWxH)		WEIGHT	
Machine (mm)	840x550x1150	Machine (kg)	150
Machine (inch)	33.1x21.7x45.3	Machine (lbs)	330
Packaged (mm)	900x690x1320	Packaged (kg)	170
Packaged (inch)	35.4x27.2x52.0	Packaged (lbs)	375

wymiary maszyny

1) Hydraulic hose, 1-2 wire / 4 wire
 2) 3-phase / 1-phase

STANDARD FEATURES

Foot Pedal Operation

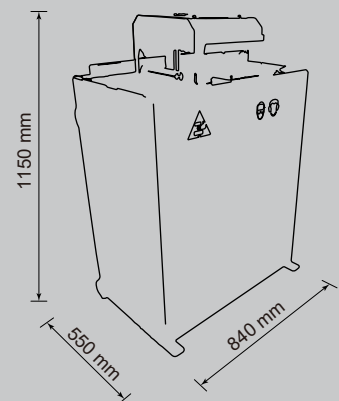

Products images & Specifications may alter prior official notice at any time.