

## zakuwarka do węży



# CC22

### TECHNICAL DATA

|                                       |                       |
|---------------------------------------|-----------------------|
| Max crimping dia (mm) <sup>1)</sup>   | 54                    |
| Max crimping dia (inch) <sup>1)</sup> | 2.12                  |
| Max crimping force (kN)               | 680                   |
| Max crimping force (tonnage)          | 68                    |
| Cycle time 10 mm (s) <sup>2)</sup>    | 1.8                   |
| Industrial hose size (mm/inch)        | 54/2.12 *             |
| Die set series                        | CC22                  |
| Max opening (mm) <sup>3)</sup>        | +25                   |
| Max opening without dies (mm)         | 109                   |
| Master die D/L (mm)                   | 84/52                 |
| Master die D/L (inch)                 | 3.31/2.05             |
| Motor Power (KW/HP)                   | 3.0/4.0(400V 3 Phase) |
| Oil tank volume                       | 35L/32L (Z-model)     |



### DIMENSIONS (LxWxH)

|                 |                |
|-----------------|----------------|
| Machine (mm)    | 680x600x1400   |
| Machine (inch)  | 26.8x23.6x55.1 |
| Packaged (mm)   | 700x820x980    |
| Packaged (inch) | 27.6x32.3x38.6 |

### WEIGHT

|                   |         |
|-------------------|---------|
| Machine (kg/lbs)  | 245/540 |
| Packaged (kg/lbs) | 275/606 |

\* ACCORDING TO THE FITTING.



- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10 mm cycle.
- 3) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

### FEATURES

Digital Precision Control  
 Automobile Industry  
 Up and Down Movement only  
 TUV CE Approved

### OPTIONS


QuickChange-tool  
 Foot pedal  
 Tool table with QuickChange-tool  
 Mechanical back stop device  
 Quality control ICC3  
 Graphical quality control ICC4  
 Auto greasing G3  
 Interface pack ETH (Communication TCP/IP & UDP)  
 A3 signal  
 Bar Code Reader BCR  
 110V/220V 1 Phase  
 230V/440V/480V 3 Phase

### CONTROL

Digital Control

### MODELS

Standard  
 Z-model

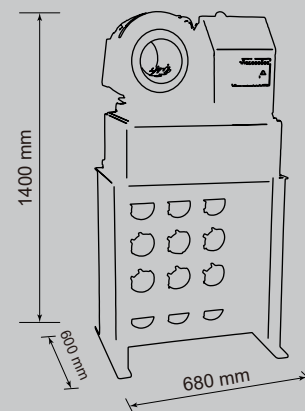

### DIE SET CC22

| DieSetNo | D(mm) | L(mm) | Crimp. range(mm) |
|----------|-------|-------|------------------|
| 18315/10 | 10    | 50    | 10.0-12.0        |
| 18315/12 | 12    | 50    | 12.0-14.0        |
| 18315/14 | 14    | 50    | 14.0-16.0        |
| 18315/16 | 16    | 50    | 16.0-19.0        |
| 18315/19 | 19    | 50    | 19.0-23.0        |
| 18315/23 | 23    | 50    | 23.0-27.0        |
| 18315/27 | 27    | 50    | 27.0-31.0        |
| 18315/31 | 31    | 50    | 31.0-36.0        |
| 18315/36 | 36    | 50    | 36.0-41.0        |
| 18315/41 | 41    | 50    | 41.0-47.0        |
| 18315/47 | 47    | 50    | 47.0-54.0        |

\* Optional die sets at additional cost

Products images & Specifications may alter prior official notice at any time.