

przecinarka do węży

CUTTING | SERVICE | C600



FEATURES

- Full Safety Protection
- Foot pedal control
- Direct Insert Hose From Front
- Max Hose up to 8"
- CE Approved

OPTIONS

- Toothed blade
- 230V/440V/480V 3 Phase

C600


TECHNICAL DATA

Max. hose size (inch) ¹⁾	8"
Diameter (blade) external (mm)	520
Diameter (blade) internal (mm)	40
Max. hose OD (mm)	75
Exhaust outlet OD (mm)	100
Motor Power (KW) ²⁾	5.5(400V 3 Phase)
Motor Power (HP) ²⁾	7.4

DIMENSIONS (LxWxH)		WEIGHT	
Machine (mm)	840x1550x1150	Machine (kg)	220
Machine (inch)	33.1x61.0x45.3	Machine (lbs)	485
Packaged (mm)	940x1560x1250	Packaged (kg)	260
Packaged (inch)	37.0x61.4x49.2	Packaged (lbs)	573

STANDARD FEATURES

Foot Pedal Control

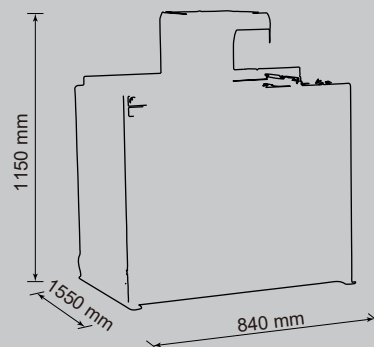

1) Hydraulic hose, 1-2 wire / 4 wire
2) 3-phase / 1-phase

Products images & Specifications may alter prior official notice at any time.