





HB240

TECHNICAL DATA	
Max crimping dia (mm/inch) ¹⁾	90/3.5"
Max crimping dia with master dies (mm/inch)	110/4.4
Max crimping force (KN)	3500
Max crimping force (tonnage)	350
Cycle time 10 mm (s) ²⁾³⁾	3
Hydraulic hose size (inch)	2"4SP
Industrial hose size (inch)	3.5
Die set series	HB240
Max opening (mm) ⁴⁾	+50
Max opening without dies (mm)	150
Master die D/L (mm)	99/80
Master die D/L (inch)	3.90/3.15
Motor Power (KW/HP) ³⁾	4.0/5.5 1.5/2.0 (400V 3 Phase)
Oil tank volume	25 L
DIMENSIONS (LxWxH)	
Machine (mm)	680x600x1400
Machine (inch)	26.8x23.6x55.1
Packaged (mm)	700x820x980
Packaged (inch)	27.6x32.3x38.6
WEIGHT	
Machine (kg/lbs)	270/595
Packaged (kg/lbs)	300/661
* ACCORDING TO THE FITTING.	



- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10 mm cycle.
- 3) 3-phase/1-phase.
- 4) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

FEATURES


- Up to 2" 4SP Hydraulic Hose
- No Axial Movement
- Digital Control or SIEMENS Touch Control
- Opening plus: +50mm
- Front Cut ideal for 90 Degree Fitting

OPTIONS

- Back stop device
- Camera and monitor
- Customized die sets
- Customized voltage
- Customized Logo
- 110V/220V 1 Phase
- 230V/440V/480V 3 Phase

CONTROL

Advanced Digital Control

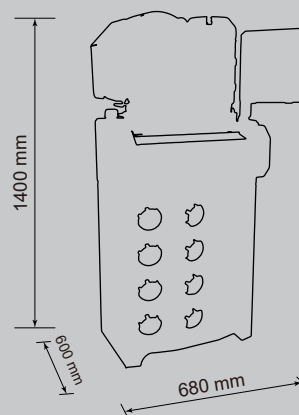

HB240 DIE SET

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
*HB240/10	10	55	10.0-12.0
*HB240/12	12	55	12.0-14.0
HB240/14	14	55	14.0-16.0
HB240/16	16	55	16.0-19.0
HB240/19	19	55	19.0-22.0
HB240/22	22	70	22.0-26.0
HB240/26	26	70	26.0-30.0
HB240/30	30	70	30.0-34.0
HB240/34	34	75	34.0-39.0
HB240/39	39	75	39.0-45.0
HB240/45	45	90	45.0-51.0
HB240/51	51	90	51.0-57.0
HB240/57	57	100	57.0-63.0
HB240/63	63	110	63.0-69.0
HB240/69	69	110	69.0-75.0
*HB240/74	74	110	74.0-80.0
*HB240/78	78	110	78.0-87.0

* Optional die sets at additional cost

Product image & Specifications may change at any time without prior notice.