SAMWAY P20HP

zakuwarka ręczna

CRIMPING | SERVICE | P20HP

FEATURES

- Portable 1 ½" Crimper
- No electricity required
- Enerpac Hand Pump
- 10 standard die sets included in the package
- Die rack included as standard in the package

OPTIONS

- 220V 1 Phase / 400V 3 Phase electrical pump
- Pneumatic Pump
- Custmized Die sets
- Custmized Logo

CONTROL

Micro Dail

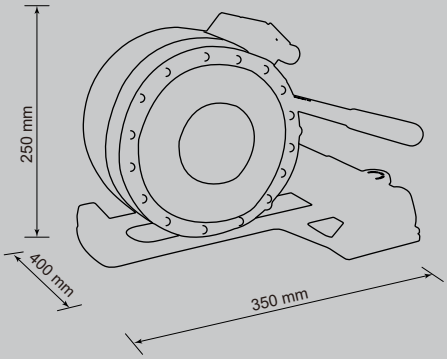

P20HP

TECHNICAL DATA

Max. crimping dia (mm/inch) [1]	61/2.40
Max crimping dia with master dies (mm/inch)	94/3.7
Max. crimping force (KN)	1400
Max. crimping force (tonnage)	143
Hydraulic hose size (inch)	1 ½ * 4SP
Industrial hose size (inch)	2.40 *
Die set series	20
Max. opening (mm) [2]	+25
Max. opening without dies (mm)	109
Master die D/L (mm)	84/80
Master die D/L (inch)	3.31/3.15
Motor Power	Hand pump

DIMENSIONS (LxWxH)

Machine (mm)	350x400x250
Machine (inch)	13.8x15.7x9.8
Packaged (mm)	640x510x430
Packaged (inch)	25.2x20.1x16.9

WEIGHT

Machine (kg/lbs)	100/220
Packaged (kg/lbs)	115/254

*** ACCORDING TO THE FITTING.**





1) With standard dies. Crimping range can be increased with special dies.
2) Maximum opening is the total die travel. Addthis value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

DIE SET 20-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
*18506/10	10	55	10.0-12.0
*18506/12	12	55	12.0-14.0
18506/14	14	55	14.0-17.0
18506/17	17	55	17.0-20.0
18506/20	20	55	20.0-24.0
18506/24	24	55	24.0-28.0
18506/28	28	75	28.0-32.0
18506/32	32	75	32.0-36.0
18506/36	36	75	36.0-40.0
18506/40	40	90	40.0-44.0
18506/44	44	90	44.0-50.0
18506/50	50	90	50.0-52.0
*18506/52	52	90	52.0-58.0
*18506/58	58	90	58.0-64.0

* Optional die sets at additional cost

Products images & Specifications may alter prior official notice at any time.