





P38Q

| TECHNICAL DATA | |
|---|--------------------------------|
| Max crimping dia ¹⁾ | 2"6SP |
| Max crimping dia with master dies (mm/inch) | 109/4.3 |
| Max crimping force (KN) | 3800 |
| Max crimping force (tonnage) | 380 |
| Cycle time 10 mm (s) ²⁾³⁾ | 4 |
| Hydraulic hose size (inch) | 2"6SP |
| Industrial hose size (inch) | 3.42 * |
| Die set series | 32 |
| Max opening (mm) ⁴⁾ | +32 |
| Max opening without dies (mm) | 132 |
| Master die D/L (mm) | 99/80 |
| Master die D/L (inch) | 3.90/3.15 |
| Motor Power (KW/HP) ³⁾ | 4.0/5.5 1.5/2.0 (400V 3 Phase) |
| Oil tank volume | 40 L |
| DIMENSIONS (LxWxH) | |
| Machine (mm) | 680x600x1400 |
| Machine (inch) | 26.8x23.6x55.1 |
| Packaged (mm) | 820x1250x980 |
| Packaged (inch) | 32.3x49.2x38.6 |
| WEIGHT | |
| Machine (kg/lbs) | 300/661 |
| Packaged (kg/lbs) | 338/745 |
| * ACCORDING TO THE FITTING. | |



- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10 mm cycle.
- 3) 3-phase/1-phase
- 4) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

FEATURES


- Digital Precision Control
- Quick Change Tool and Die rack
- 2" 6SP Hydraulic Hose
- Pump Made In Germany by Voith
- TUV CE Approved

OPTIONS

- Back stop device
- Camera and monitor
- Customized die sets
- Customized voltage
- Customized Logo
- 110V/220V 1 Phase
- 230V/440V/480V 3 Phase

CONTROL

Control with advanced programmable chip

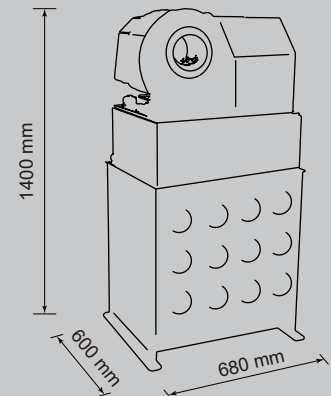

DIE SET 32-SERIES

| DieSetNo | D (mm) | L (mm) | Crimp. range (mm) |
|-----------|--------|--------|-------------------|
| *18506/10 | 10 | 55 | 10.0-12.0 |
| *18506/12 | 12 | 55 | 12.0-14.0 |
| 18506/14 | 14 | 55 | 14.0-16.0 |
| 18506/16 | 16 | 55 | 16.0-19.0 |
| 18506/19 | 19 | 55 | 19.0-22.0 |
| 18506/22 | 22 | 70 | 22.0-26.0 |
| 18506/26 | 26 | 70 | 26.0-30.0 |
| 18506/30 | 30 | 70 | 30.0-34.0 |
| 18506/34 | 34 | 75 | 34.0-39.0 |
| 18506/39 | 39 | 75 | 39.0-45.0 |
| 18506/45 | 45 | 90 | 45.0-51.0 |
| 18506/51 | 51 | 90 | 51.0-57.0 |
| 18506/57 | 57 | 100 | 57.0-63.0 |
| 18506/63 | 63 | 110 | 63.0-69.0 |
| 18506/69 | 69 | 110 | 69.0-75.0 |
| *18506/74 | 74 | 110 | 74.0-80.0 |
| *18506/78 | 78 | 110 | 78.0-87.0 |

* Optional die sets at additional cost

Products images & Specifications may alter prior official notice at any time.