



### FEATURES

Full Automatic Precision Control  
 Quick Change Tool and Die rack  
 Energy Saving and Safety Operation  
 CE Approved

### OPTIONS

Backstop Device  
 Control by Pressure  
 110V/220V 1 Phase  
 230V/440V/480V 3 Phase

# PE38

### TECHNICAL DATA

Max Hydraulic Hose	2"4SP
Crimping Range (mm) <sup>1)</sup>	4-87
Die Type	PE38
Master Die Length (mm)	80
Max Opening (mm) <sup>2)</sup>	+38
Motor (KW)	4(400V 3 Phase)
Crimping Force (KN)	2200
Crimpings Per Hour	1200
Noise Level (dBA)	65
Protection Class	IP56



### DIMENSIONS (LxWxH)

Machine (mm)	650x450x650
Machine (inch)	25.6x17.7x25.6
Packaged (mm)	750x550x800
Packaged (inch)	29.5x21.7x31.5

### WEIGHT

Machine (kg/lbs)	300/661
Packaged (kg/lbs)	330/728


\* ACCORDING TO THE FITTING.



- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

### CONTROL

Advanced Programmable Chip

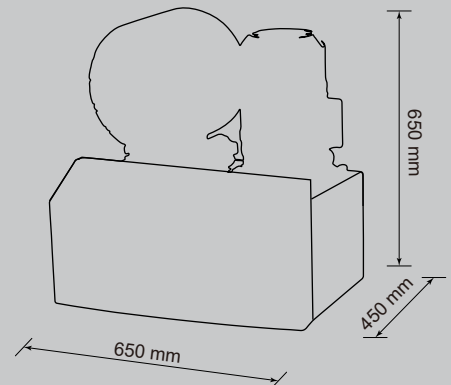

### DIE SET 38-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18506/15	15	55	10.0-18.0
18506/18	18	55	18.0-21.0
18506/21	21	55	21.0-24.0
18506/24	24	55	24.0-27.0
18506/27	27	55	27.0-33.0
18506/33	33	55	33.0-39.0
18506/39	39	75	39.0-45.0
18506/45	45	75	45.0-51.0
18506/51	51	90	51.0-57.0
18506/57	57	90	57.0-66.0
18506/66	66	90	66.0-75.0

\* Optional die sets at additional cost

Products images & Specifications may alter prior official notice at any time.