


# S280

TECHNICAL DATA	
Industrial Hose	10"
Max Hydraulic Hose	4"6SP
Crimping Range (mm)	4-280
Die Type	P32
Crimping Speed Second	5
Max Opening (mm) <sup>1)</sup>	+50
Motor Power (KW/HP) <sup>1)</sup>	7.5/10.0(400V 3 Phase)
Crimping Force (KN)	15000
Crimpings Per Hour	450
Foot pedal	Included
Noise Level (dBA)	65
Protection Class	IP56
DIMENSIONS (LxWxH)	
Machine (mm)	800x1700x1750
Machine (inch)	31.5x66.9x68.9
Packaged (mm)	1150x1150x1600
Packaged (inch)	45.3x45.3x63.0
WEIGHT	
Machine (kg/lbs)	1300/2866
Packaged (kg/lbs)	1400/3086
<b>* ACCORDING TO THE FITTING.</b>	

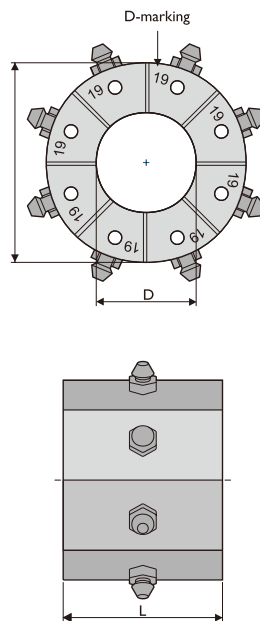

1) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

### FEA URES


Full Automatic Control with Foot pedal  
 10" Industrial Hose  
 Energy Saving and Safety Operation

### OPTIONS

Die Rack  
 Quick Change Tool  
 Backstop Device  
 Control by Pressure  
 110V/220V 1 Phase  
 230V/440V/480V 3 Phase

### CONTROL

Digital Control

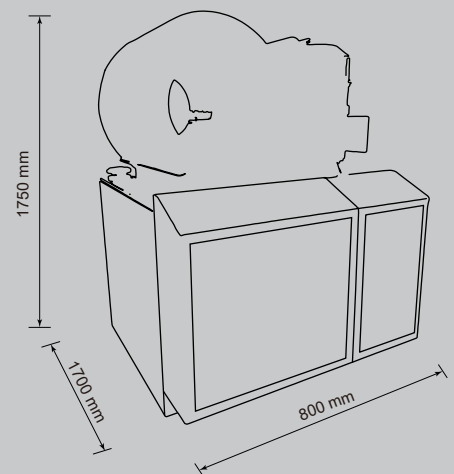

Products images & Specifications may alter prior official notice at any time.