


DIMENSIONS - METRIC
SELF-CENTRING BONDED SEALS


PODKŁADKI METRYCZNE

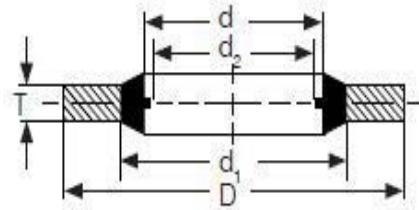

Thread size	D + 0.13 mm - 0.00 mm	d ₁ + 0.10 mm - 0.10 mm	d + 0.10 mm - 0.10 mm	d ₂ + 0.00 mm - 0.20 mm	T mm	Min. burst pressure bar
M 4	7	5.4	4.50	3.40	1.0	1270
M 6	11	8.0	6.60	4.70	1.0	1680
M 8	14	10.4	8.70	6.40	1.0	1550
M10	16	12.0	10.35	8.56	2.0	1500
M10	16	12.4	10.70	8.05	1.5	1350
M12	18	14.4	12.70	9.73	1.5	1250
M14	22	16.4	14.70	11.38	1.5	1510
M16	24	18.4	16.70	13.41	1.5	1400
M18	26	20.4	18.70	14.76	1.5	1275
M20	28	22.5	20.70	16.76	1.5	1150
M22	30	24.4	22.70	18.74	2.0	1100
M24	32	26.4	24.70	20.11	2.0	1050
M42	54	45.6	43.00	36.50	2.5	890

DIMENSIONS - INCHES
SELF-CENTRING BONDED SEALS

PODKŁADKI CALOWE

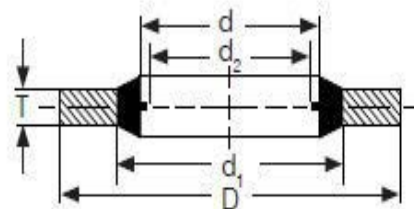

Thread size		D + 0.13 mm - 0.00 mm	d ₁ + 0.10 mm - 0.10 mm	d + 0.10 mm - 0.10 mm	d ₂ + 0.00 mm - 0.20 mm	T mm	Min. burst pressure bar
UNC	R						
3/8	1/8	15.88	11.84	10.37	8.56	2.03	1500
1/2	1/4	20.57	15.21	13.74	11.45	2.03	1550
	3/8	23.80	18.75	17.28	14.96	2.03	1260
13/16	1/2	28.58	23.01	21.54	18.64	2.34	1150
7/8	5/8	31.75	24.97	23.49	20.60	2.34	1250
1	3/4	34.93	28.53	27.05	24.13	2.34	1060
1 3/16	7/8	38.10	32.29	30.81	27.89	2.34	900
1 5/16	1	42.80	36.88	33.89	30.30	2.50	790
1 5/8	1 1/4	52.38	45.93	42.93	38.96	3.25	690
1 7/8	1 1/2	58.60	51.39	48.44	44.86	3.25	690
	2	73.03	63.63	60.58	56.67	3.25	700